



# PLATUNA®-Alloy 1 Platinum Ruthenium Electrolyte

Extraordinarily abrasion-resistant coatings – saving platinum

PLATUNA®-Alloy 1 is used for depositing smooth, ultra-bright and extraordinarily abrasion-resistant platinum-ruthenium alloy coatings. The acidic electrolyte is used for decorative applications and guarantees light, white layers - crack-free up to 1 µm.

PLATUNA®-Alloy 1 works across a wide operating range and reaches an excellent covering speed. It is used for rack operation.



## Electrolyte characteristics

Electrolyte type	Strongly acidic
Metal content	1.0 (0.8 - 1.2) g/l Pt 1.0 (0.8 - 1.2) g/l Ru
pH value	< 1
Operating temperature	35 (30 - 40) °C
Current density range	2.0 (0.5 - 5.0) A/dm <sup>2</sup>
Plating speed	Approx. 0.08 µm/ min at 2.0 A/dm <sup>2</sup>
Anode material	MMO (type PLATINODE® 187 SO)

## Coating characteristics

Coating	Platinum-ruthenium
Alloy composition	75 weight % Pt 25 weight % Ru
Colour of deposit	White
Brightness	Bright
Hardness	Not measurable, Approx. 500 HV

Max. coating thickness	1.0 µm
Density of the coating	Approx. 19.16 g/cm <sup>3</sup>


## Advantages

- Acidic platinum alloy electrolyte - saves expensive platinum
- Light, white and ultra-bright coatings
- For decorative applications
- Extraordinarily abrasion-resistant
- Wide operating range
- Up to 1 µm layer thickness (crack-free)
- The coatings are RoHS compliant
- Suitable for racks

## Applications

- Jewellery
- Writing implements
- Watches
- Spectacle frames
- Accessories

### Bosch-Weinmann Wear Test

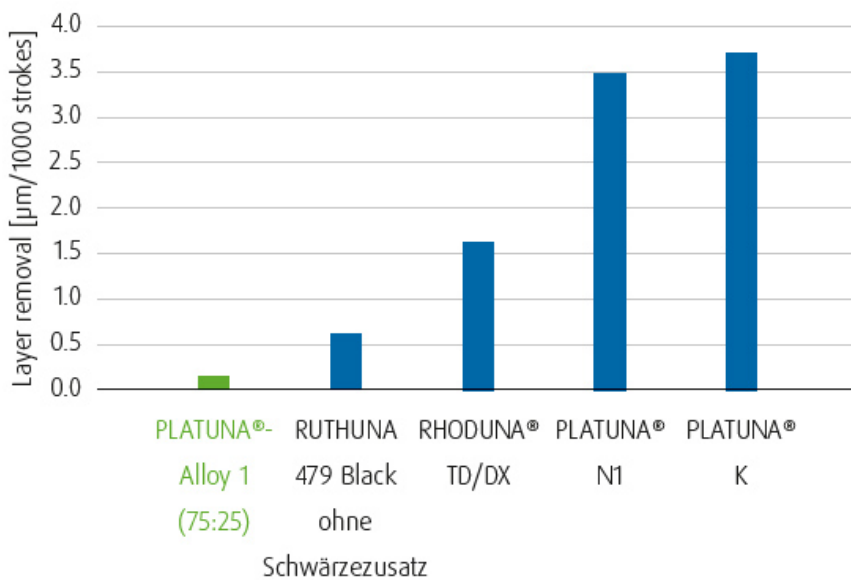

## Your contact person




**Markus Legeler**

Manager Sales International

T: +49 7171 607 204

F: +49 7171 607 316

[markus.legeler@eu.umicore.co](mailto:markus.legeler@eu.umicore.com)  
[m](mailto:markus.legeler@eu.umicore.com)